

## 1.0 Product description

Feature	Description
Dimensions (W x D x H)	45 x 20 x 10 mm ( 1.77 x 0.78 x 0.39 in)
Power requirements	Powered from VBUS 5 Volts
Operating temperature	0° C to 45° C (32° F to 113° F)
Operation humidity	10% to 85%, non-condensing
Storage temperature	-10° C to 70° C (14 ° F to 158° F)
Ports	1 DisplayPort (Supports 4K UHD 3840*2160/60hz)

## 2.0 How to operate


### Connection to the computer or mobile device

Connect MediaGear Type C to DisplayPort adapter to your computer or mobile device by plug in the Type C connector in to your computer or mobile device's Type C port.

### Connecting an DisplayPort display device

Connect the MediaGear Type C to DisplayPort adapter to a high-definition television or monitor through the DisplayPort. To transmit video signals through the DisplayPort, you need a DisplayPort cable (purchased separately).

## 3.0 Connection graph

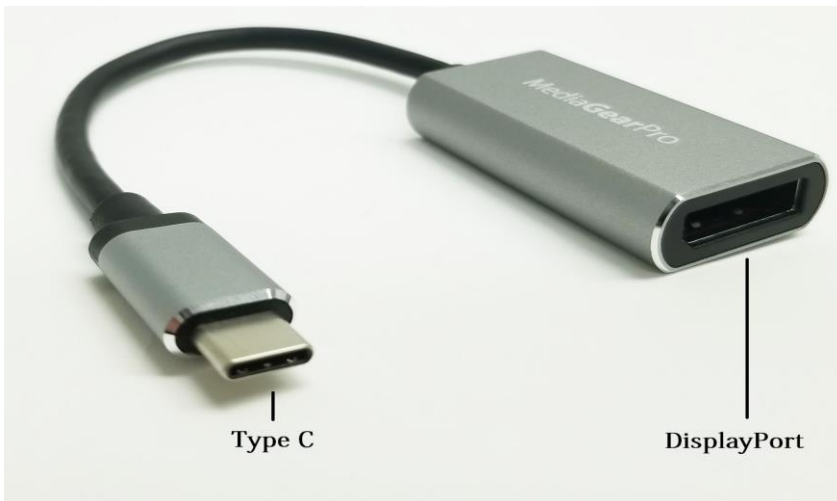

Thank you for your purchase and please write a review for your new product. Your feedback is truly valuable to us!

If you have any questions, concerns, difficulties or would like more information about our latest products, please contact us at [customerservice@mediagearpro.com](mailto:customerservice@mediagearpro.com) or visit <http://mediagearpro.com>

We appreciate your time and thoughts.