

1.0 Product description

| Feature | Description |
|------------------------|-----------------------------------------------------|
| Dimensions (W x D x H) | 45 x 30 x 15 mm (1.77 x 1.18 x 0.59 in) |
| Power requirements | Powered from VBUS 5 Volts |
| Operating temperature | 0° C to 45° C (32° F to 113° F) |
| Operation humidity | 10% to 85%, non-condensing |
| Storage temperature | -10° C to 70° C (14 ° F to 158° F) |
| Ports | 1 Mini DisplayPort (Supports 4K UHD 3840*2160/60hz) |

2.0 How to operate


Connection to the computer or mobile device

Connect MediaGear Type C to Mini DisplayPort adapter to your computer or mobile device by plugging the Type C connector in to your computer or mobile device's Type C port.

Connecting an DisplayPort display device

Connect the MediaGear Type C to Mini DisplayPort adapter to a high-definition television or monitor through the DisplayPort. To transmit video signals through the Mini DisplayPort, you need a Mini DisplayPort cable (purchased separately).

3.0 Connection graph

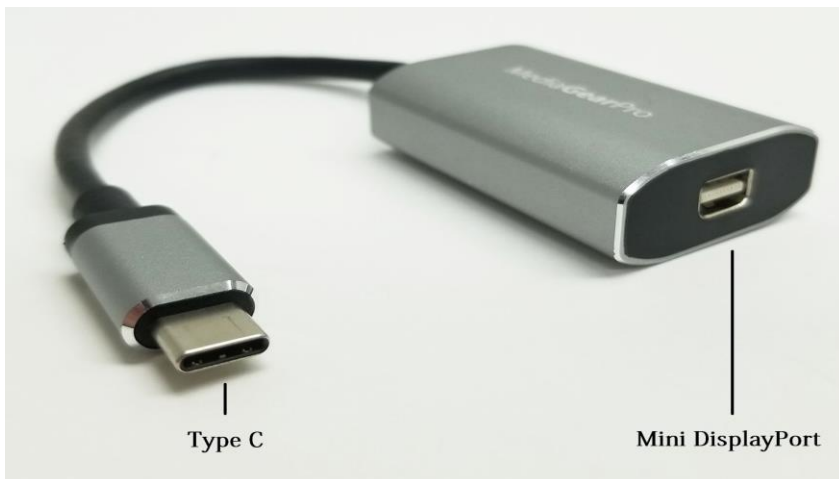

Thank you for your purchase and please write a review for your new product. Your feedback is truly valuable to us!

If you have any questions, concerns, difficulties or would like more information about our latest products, please contact us at customerservice@mediagearpro.com or visit <http://mediagearpro.com>

We appreciate your time and thoughts.